


Silt Sifter® Tube

Like the **Silt Sifter® Bag**, the patented **Silt Sifter® Tube** is a dual-component sediment control device that is also designed for ‘*filtration*’ and ‘*high-flow*’ but is more flexible allowing for customized protection such as around grated drain inlets. The applications are unlimited.

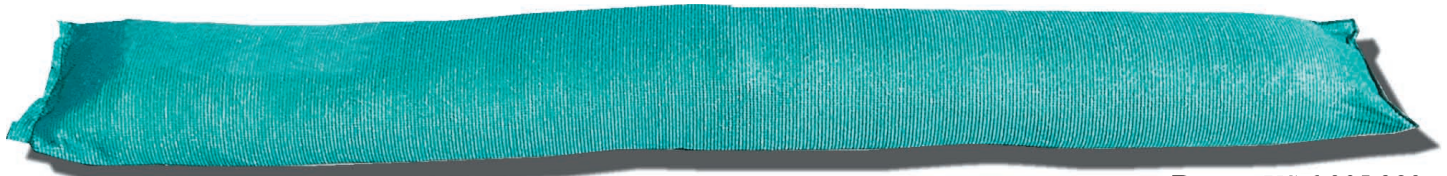

Patent US 6,905,289

Product Specifications

- **Outer Material** High density polyethylene - Poly thread (4) lock stitching
- **Filtering Media** Pine Wood Excelsior*
- **Rock Bag** High density polyethylene - Poly thread (4) lock stitching
- **Stabilization** 3/8” pea gravel (filled)
- **UV Rating** 85% with 364° flammability point
- **Dimensions** 60”L x 9” Diameter
- **Weight (Dry)** Approximately 30 lbs. (filled)
- **Durability** 500 lb. burst strength
- **Maintenance** Clean with power wash or strong hose

*Pine wood excelsior acts as a filter for capturing silt, sediment and soils. Also a cushioning agent to substantially reduce product damage under normal conditions.

Flow Test Results

- **Free Flow Water (no debris)** 30 GPM (gallons per minute)
- **Sand** 29 GPM
- **Top Soil** 28 GPM
- **Clay** 24 GPM



Silt Sifter Bag / Tube Material Specifications		
PROPERTY	TEST METHOD	DATA
<i>Mechanical</i>		
Break Strength (Grab)	ASTM D-5034	Warp: 89 lbs - Fill: 123 lbs
Break Elongation (Grab)	ASTM D-5034	Warp: 59% - Fill: 64%
Tear Strength	ASTM D-5587	Warp: 44 lbs - Fill: 45 lbs
Burst Strength	ASTM D-3786	193 psi
Trapezoidal Tear	ASTM D-4533	80 lbs
<i>Endurance</i>		
UV Resistance	ASTM D-4355	75%
<i>Hydraulic</i>		
Flow Rate	ASTM D-4491	~400 gpm
<i>Physical</i>		
Composition	N/A	Polyethylene 95% Pigment 3% Misc. Additives 2% (Antioxidants, UV Stabilizers)
Weight	ASTM D-3376	4.25 oz/sq-yd



800-626-1028

www.psibmp.com

info@psibmp.com

Dispose of unit in accordance with applicable Federal, state and local environmental laws and regulations. The user is solely responsible for compliance with maintenance and disposal laws and regulations. The manufacturer or seller assumes no responsibility for proper or improper maintenance or disposal.