


Curb Inlet Filter (CIF)

The **Curb Inlet Filter** makes protecting curb opening inlets effective and easy. At 72" in length, the **Curb Inlet Filter** is longer than most single curb openings providing complete inlet coverage. Built for durability, the **Curb Inlet Filter** is encased in a high density polyethylene fabric, secured with 4 thread poly lock stitching and an 85% U.V. rating designed to handle even the most severe climates.

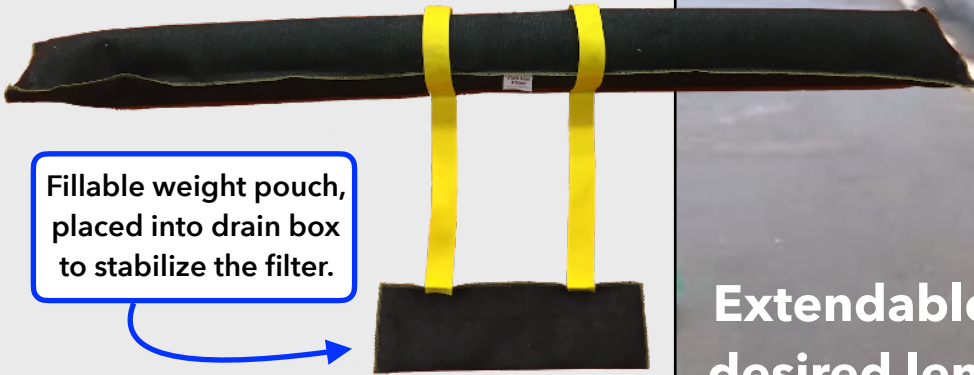

Fillable weight pouch, placed into drain box to stabilize the filter.

Extendable to
desired length

Quick Look

- **Outer Material** High density polyethylene - Poly thread (4) lock stitching
- **Strapping** Weather resistant 2" polypropylene webbing
- **UV Rating** 85% with 364° flammability point
- **Filtering Media** Aspen wood excelsior
- **Dimensions** 72" x 5" diameter (units can be joined to extend length)

Specifications

PROPERTY	TEST METHOD	DATA
Mechanical		
Break Strength (Grab)	ASTM D 5034	Warp: 89 lbs - Fill 123 lbs
Break Elongation (Grab)		Warp: 59% - Fill 64%
Tear Strength	ASTM D 5587	Warp: 44 lbs - Fill 45 lbs
Burst Strength	ASTM D 3786	193 psi
Trapezoidal Tear	ASTM D 4533	80 lbs
Endurance		
UV Resistance	ASTM D 4355	85.00%
Hydraulics/Filtration		
Flow Rate	ASTM D 4491	~190 gpm
Physical		
Composition	N/A	Polyethylene 95% Pigment 3% Misc. Additives 2% (Antioxidants, UV Stabilizers)
Weight	ASTM D 3376	4.25 oz/sq-yd
Dispose of unit in accordance with applicable Federal, state and local environmental laws and regulations. The user is solely responsible for the compliance with maintenance and disposal laws and regulations. The manufacturer or seller assumes no responsibility for proper or improper maintenance or disposal.		

